

NORTHFIELD™ DELUXE GAS BURNING STOVE



SMALL BAY WINDOW CAST IRON STOVE

The Northfield™ cast iron gas stove is a true work of art. It's classical Early American design and three-side bay window fireview more resembles a piece of fine furniture than a gas stove. The Award winning Ember-Fyre® Burner features realistic logs, glowing embers and the most wood-like fire of any gas stove. The standard GreenSmart™ Remote system with automatic heat/flame adjustment with a huge high-to-low flame turndown ratio - up to 70%.


Comfort Control™ that allows you to turn off the rear burner for less heat to provide for year-round enjoyment of the fire. Choice of pilot ignition modes - Choose GreenSmart™Pilot • setting to save money or Continuous Pilot during winter months where a heated chimney is needed to maintain the draft to ensure proper operation.

The 130 CFM fan increases efficiency by enhancing the transfer of convective heat in your home.

SPECIFICATIONS


- Maximum BTU Input per Hour 22,000 (NG & LP)
- Minimum BTU Input per Hour 6,700 (NG), 6,300 (LP)
- Heating Capacity* Up to 850 sq. ft.
- Canadian P.4.1 Efficiency Up to 69.86% NG
Up to 72.21% LP
- Steady State Efficiency (High) Up to 79.9% (NG)
Up to 81.37% (LP)
- Weight 130 Lbs (97 Kg)
- Glass Viewing Area: 283 sq. in.
Front: 12-1/2" H x 13-3/4" W
Side: 11-3/4" H x 6-1/2" W

*Heating Capacity can be affected by negative pressure in the home and by prevailing atmospheric conditions. Contact local building or fire officials about restrictions and installation requirements in your area.

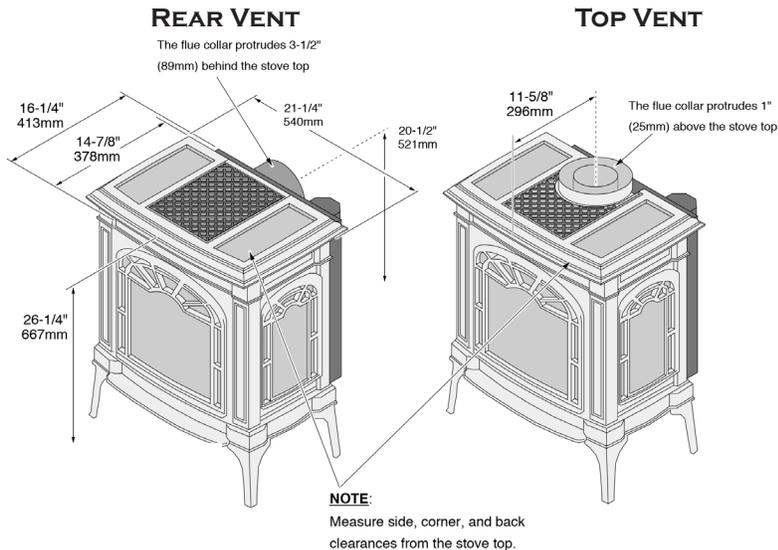

CLEARANCES TO COMBUSTIBLES

All measurements are to be taken from the stove top to combustible walls.

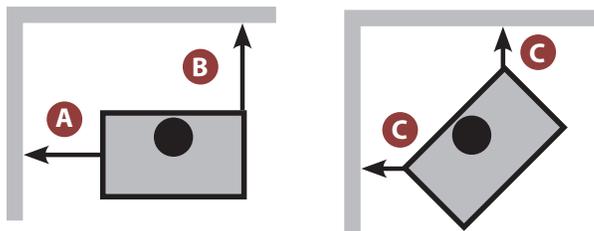


- A - Stove to Sidewall 3-1/2" (89mm)
- B - Stove to Backwall 5" (127mm) top vent
8-1/2" (216) rear vent
- C - Stove to Corner 1" (25mm)

For straight wall installations the vent is centered 7-1/8" from backwall.
For corner installations the vent is centered 15-3/4" from the wall.

LOCATION OPTIONS WITH DIRECT VENT SYSTEM

Direct Venting System provides for horizontal or vertical venting through the outside wall or ceiling, allowing you to install your stove virtually anywhere in the room. Horizontal venting must rise at least 2' (NG) and 3' (LP) above stove top before elbowing.

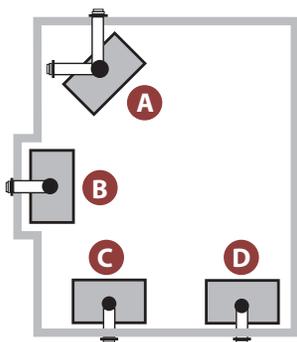

You can install your stove in any of these configurations:

- A - Cross Corner
- B - Flat with Wall/Alcove
- C - Flat on Wall Corner
- D - Flat on Wall

Where would you like the stove to go in your home?

HEARTH PAD:

A non-combustible hearth pad is required when the stove is installed directly on carpeting, vinyl or combustible flooring other than wood.

No hearth pad is required if the stove is installed on non-combustible flooring (tile, stone, brick) or if installed on a wood or wood laminate floor.

